


Customer:


Customer NO.:

Customer Approve By:

REV.	DESCRIPTION OF MODIFY	MODIFY BY:	DATE
A0	1(ST)DESIGN(DV12864G-3)FPC???	DZQ	2012.02.29
A1	FPC	DZQ	2012.04.17

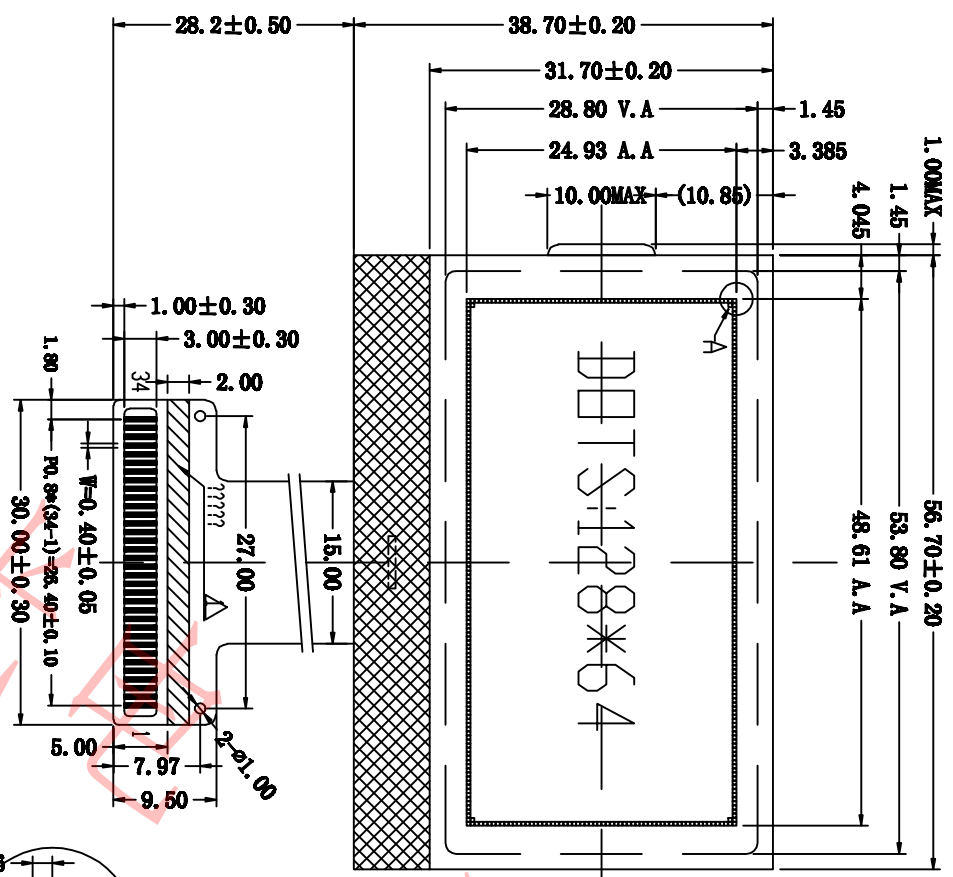

PIN	DESC	PIN	DESC
1	NC	18	NC
2	NC	19	VSS
3	NC	20	VDD
4	NC	21	D7(SDA)
5	NC	22	D6(SCLK)
6	NC	23	NC
7	NC	24	NC
8	NC	25	NC
9	NC	26	NC
10	NC	27	NC
11	VG	28	NC
12	NC	29	NC
13	NC	30	NC
14	NC	31	A0
15	NC	32	RST
16	XV0	33	CSB
17	V0	34	NC

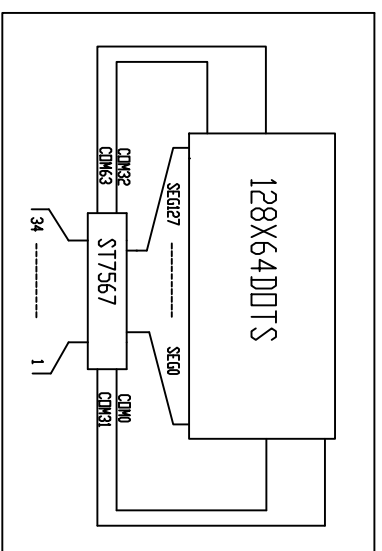

DETAIL A (5:1)

- Note:
- 1.DISPLAY TYPE:
 - 2.LCD POLARIZER TYPE:
 - 3.VIEWING DIRECTION:
 - 4.LCD OPERATING VOLTAGE:
 - 5.OPERATING TEMP:
 - 6.DRIVE METHOD:
 - 7.LCD CONNECTOR:
 - 8.DISPLAY DRIVER:
 - 9.BACK LIGHT:
 - 10.Unspecified tolerance is ±0.20mm
 - 11.RDHS Request
- STNXY-G)/POSITIVE
TRANSMISSIVE
6:00 O'Clock
VDD=3.0V,VLCD=8.7V
-10~+50°C
-20~+70°C
1/65Duty,1/7 Bias
CDG/FPC
ST7567 or replaceable
ND

深圳市迪威光电有限公司

LCM NO:DV12864G-3 DWG NO.: DV12864G-3

CD	UNIT: MM	SIZE: A4
	SHEET: 1	DF 1

DRAWN BY: CHECKED BY: APPROVED BY:

REV:1