

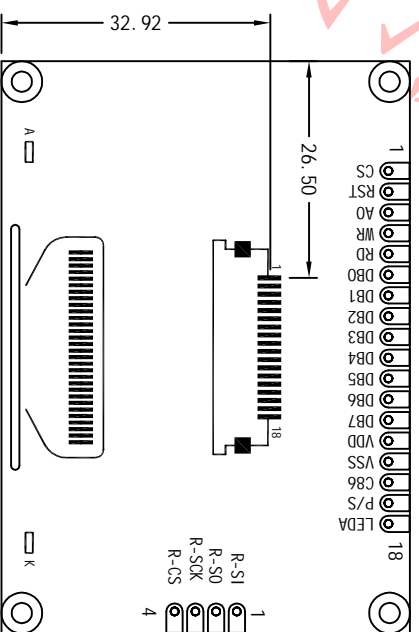
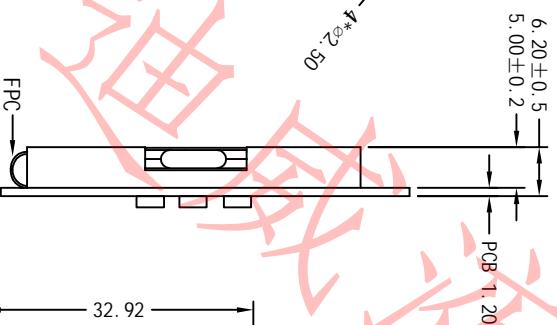


CON1		CON2	
1	CS	1	R-SI
2	RST	2	R-S0
3	A0(RS)	3	R-SCK
4	WR	4	R-CS

5	R0(E)
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6
13	DB7
14	VDD
15	VSS
16	CS6
17	P/S
18	LEDA

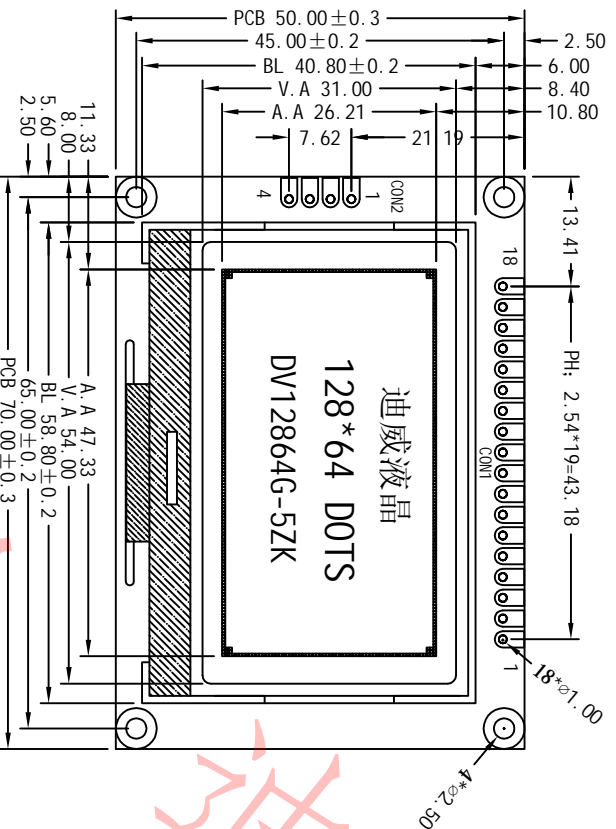

SPECIFICATION:

- 1). STN(BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/64. BIAS: 1/9. VOP=9.0V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: WHITE I=60MA
- 6). DRIVE IC: ST7565R+GT20L16S1V
- 7). DRIVE POWER: VDD=3.3V

深圳市迪威光电有限公司
TFL: 0755-27578730 27578186

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	PROJECTION	SHEET:	DATE:
DESIGN BY:			2013/2/21	DV12864G-5ZK		1 OF 1	2013/2/21
CHECKED BY:							
CUSTOM NO.:				DO NOT SCALE THIS DRAWING.			