



IF	SOMBLE
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	NC
17	/RST
18	NC
19/21	LEDA
20/22	LEDK

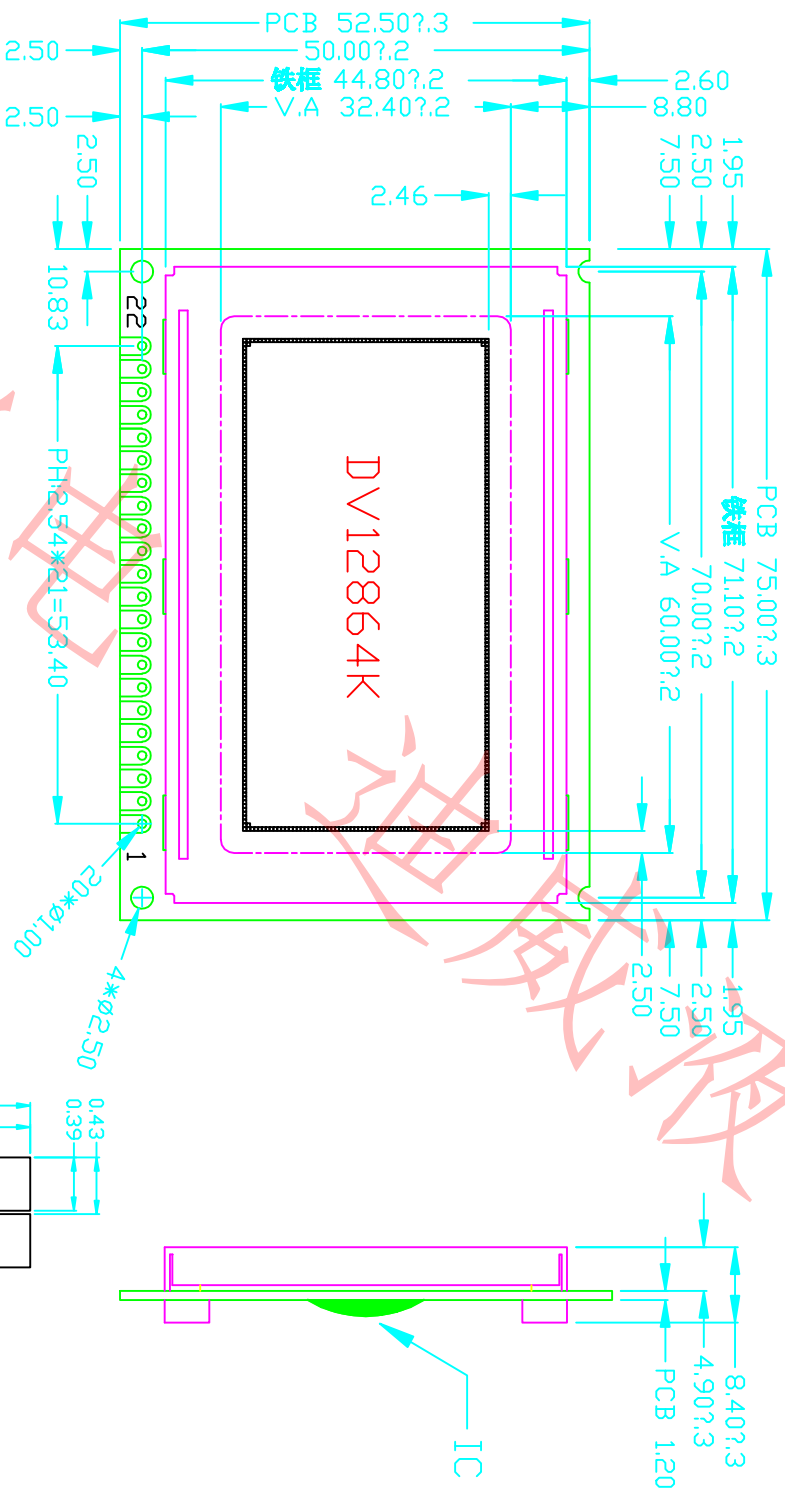

- NOTES:
- DISPLAY TYPE: STN.BLUENEGATIVE/TRANSMISSIVE
 - OPERATING VOLTAGE: VLCD=4.2V,VDD=5.0V
 - OPERATING TEMPERATURE: -20°C~+70°C
 - STORAGE TEMPERATURE: -30°C~+80°C
 - DRIVE MODE: 1/32DUTY,1/6BIAS
 - VIEWING DIRECTION: 6:00
 - DRIVE IC: ST7920
 - CONNECTOR: ZEBRA
 - BACKLIGHT: LED(WHITE),I<70MA

深圳市迪威光电有限公司
 0755-27578730 27578186
<http://www.lcm lcd.net>
<http://www.szdv lcm.com>