


INTERFACE:	1	AVSS
	2	AVDD
	3	VSS
	4	VDD
	5	V0
	6	RS
	7	/WR
	8	E/RD
	9	/CS1
	10	CS2
	11	BUSY
	12	INT
	13	/RESET
	14	DB0
	15	DB1
	16	DB2
	17	DB3
	18	DB4
	19	DB5
	20	DB6
	21	DB7
	22	VOUT
	23	LED+
	24	LED-

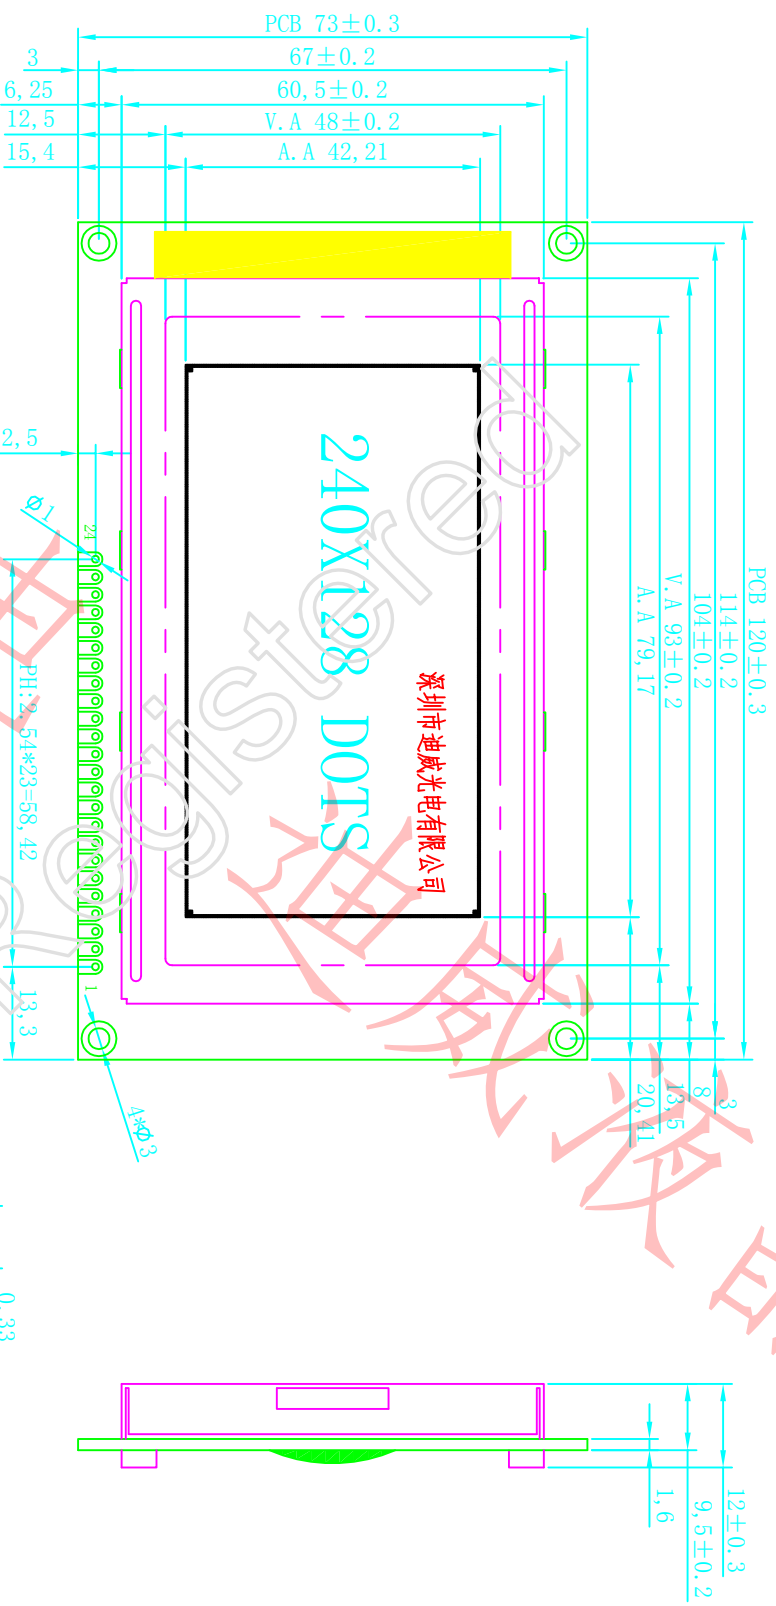

**SPECIFICATIONS**

STORAGE TEMP : -30°C TO +80°C  
 OPERATING TEMP : -20°C TO +70°C  
 VIEWING DIRECTION : 12 O'CLOCK  
 DRIVE CONDITION : 1/128 DUTY, 1/13 BIAS,VOP=13V  
 DISPLAY MODE : STN TRANSMISSIVE NEGATIVE(BLUE)  
 BACK LIGHT ITEM: WHITE,I=120mA  
 LCM OPERATING VOLTAGE:5.0V  
 CONTROLLER/DRIVER IC:RA8806

**DV240128GB-3**

**TEL: 0755-27578730**