


INTERFACE:	1	AVSS
	2	AVDD
	3	VSS
	4	VDD
	5	V0
	6	RS
	7	/WR
	8	E/RD
	9	/CS1
	10	CS2
	11	BUSY
	12	INT
	13	/RESET
	14	DB0
	15	DB1
	16	DB2
	17	DB3
	18	DB4
	19	DB5
	20	DB6
	21	DB7
	22	VOUT
	23	LED+
	24	LED-

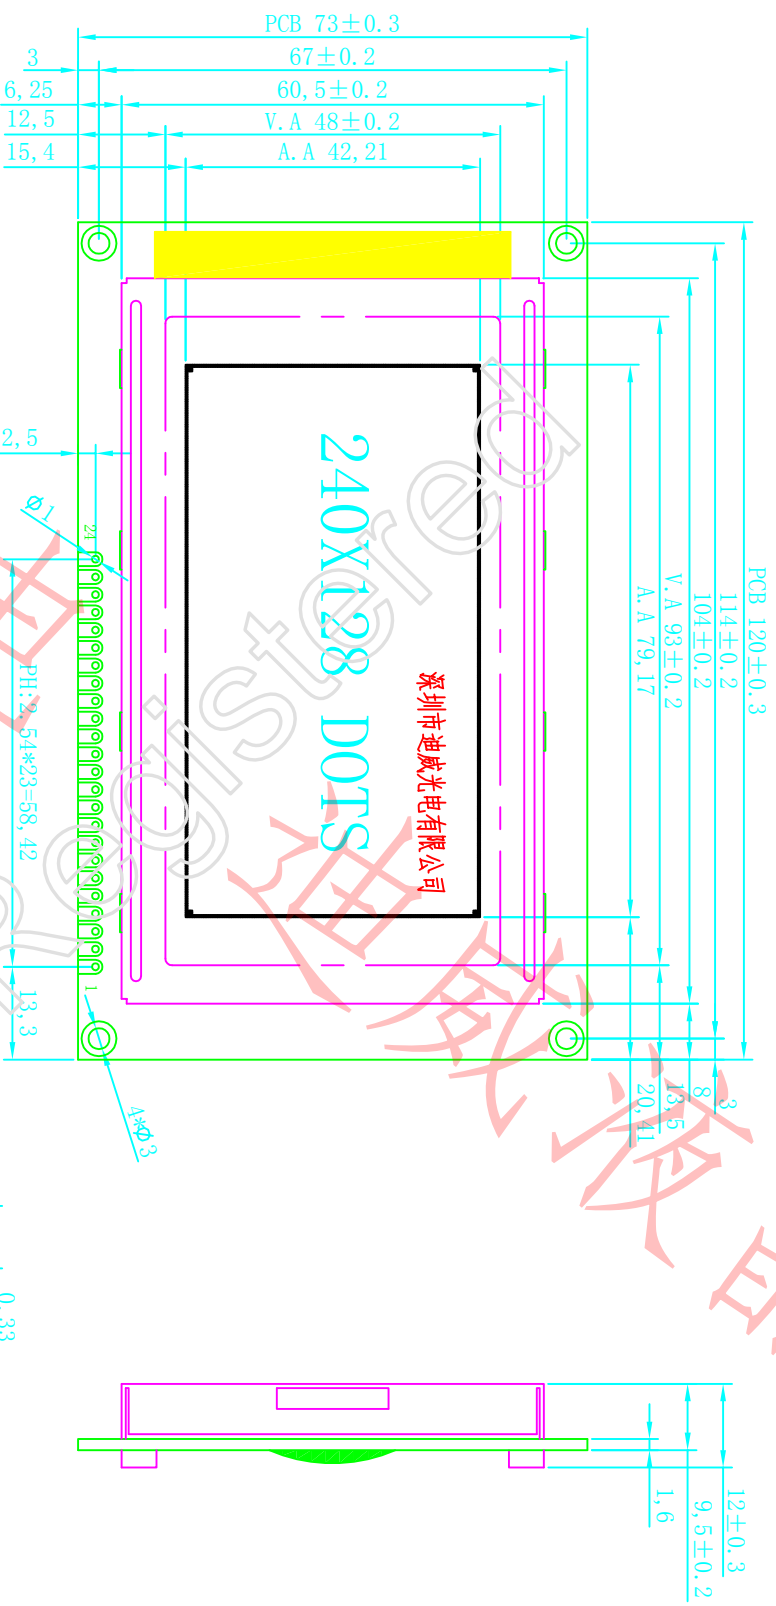

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 12 O'CLOCK
 DRIVE CONDITION : 1/128 DUTY, 1/13 BIAS,VOP=13V
 DISPLAY MODE : STN TRANSMISSIVE NEGATIVE(BLUE)
 BACK LIGHT ITEM: WHITE,I=120mA
 LCM OPERATING VOLTAGE:5.0V
 CONTROLLER/DRIVER IC:RA8806

DV240128GB-3

TEL: 0755-27578730